


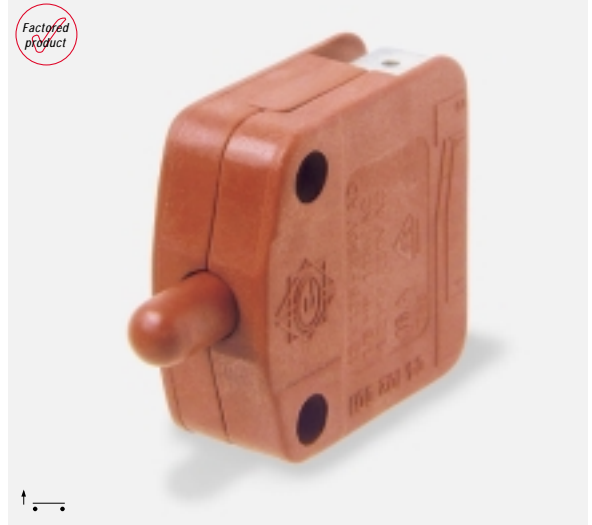
# 04102 Push Button Switches 16(4)A 250Vac


 **D** 16(4)A 250Vac T85 (10,000 operations)

Snap action normally open or closed switching  
 Large overtravel allows actuator / button tolerance  
 Button shape allows operation by hinged actuators

μ contact gap  
 UL94 V1 Button and body  
 Complies with UL Glow wire test - 850°C Cat D








Additional technical data on pages 4 & 5



 04102-001


## 04102-001

TERMINAL FUNCTION ACTUATOR BODY

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY
 <p>6.3 x 0.8</p> <p>Force when applying connectors ≤80N</p>	<p><b>04102-001</b></p>  <p>Single Pole ON-OFF (momentary ON)</p>	 <p>(Off) 15.0                      (Mom On) 12.4                      (Full Travel) 8.0</p>	<p>2 Hole fixing</p>  <p>Ø4.5 22.0</p> <p>(shakeproof washers not to be used with fixings)</p>
 <p>6.3 x 0.8</p> <p>Force when applying connectors ≤80N</p>	<p><b>04102-001R</b></p>  <p>Single Pole ON-OFF (momentary OFF)</p>	 <p>(On) 15.2                      (Mom Off) 13.0                      (Full Travel) 8.2</p>	<p>(shakeproof washers not to be used with fixings)</p>

### Dimensions (mm)

#### 04102-001

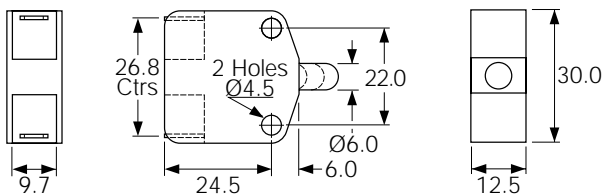

#### 04102-001R

